
KRIDHA®
LAMINATES
QUALITY KI BAAT KRIDHA KE SAATH

KRIDHA®
LAMINATES
QUALITY KI BAAT KRIDHA KE SAATH

Clean Lines. Bold Statements

Naturally Durable. Beautifully Designed.

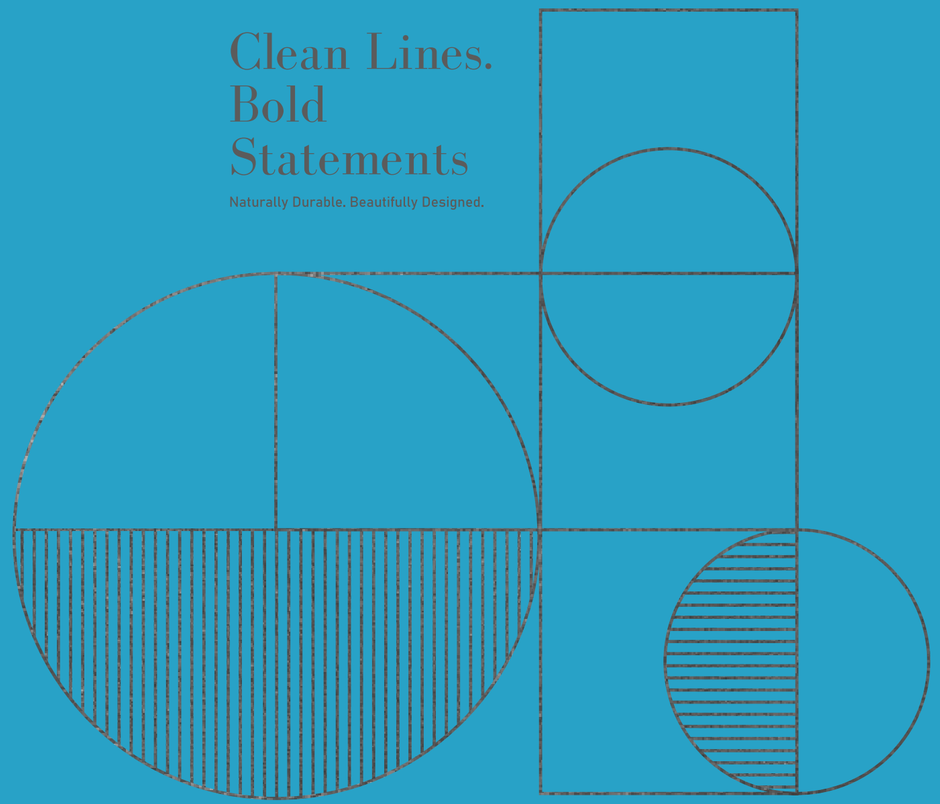

KRIDHA®
LAMINATES
QUALITY KI BAAT KRIDHA KE SAATH

ABOUT US



KRIDHA®
LAMINATES
QUALITY KI BAAT KRIDHA KE SAATH

Beautiful interiors not only look attractive but also have the ability to add warmth and appeal to any place. Decorative laminates ensure that the surface interiors of a place look appealing and diffuse a feeling of utter enchantment when looked at. With an array of options available with kridha laminate, most people do not even have second thoughts about using decorative laminates in increase the beauty of their house or office interiors. Tapping the resources to the best possible, we have achieved a competitive advantage due to the technology innovation we exhibit and delivering great customer satisfaction. For delivering unparalleled quality, we use superior decorative paper and have adequate manufacturing capacity and stock to fulfil the market requirements.

Feel a spark in your interior wood working with kridha laminates. Selected designs crafted on high quality decorative paper are just like a fresh decorative spices for your interior decoration that will certainly add zing in your interior.

Sleek
Lam

STONE SERIES



Elevate your space with timeless design that balances elegance, innovation, and the unique energy of your lifestyle.

KRIDHA® LAMINATES
QUALITY KI BAAT KRIDHA KE SAATH



824 | EMPERADOR MARBLE


STONE SERIES

From vision to reality, we create timeless, functional interiors that embrace style, comfort, and individuality in every corner of your home.



825 | CLASSENTINO MARBLE



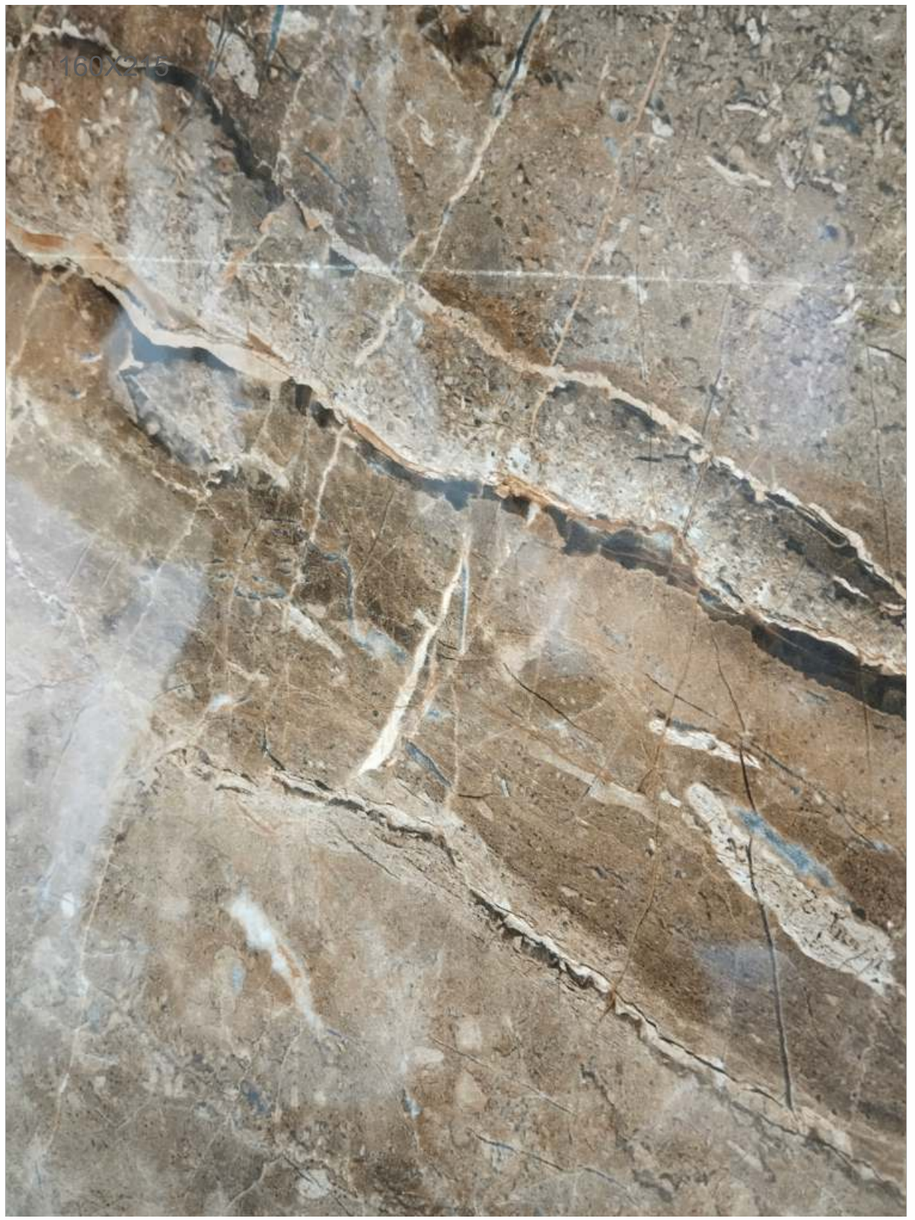

826 | RAINFOREST MARBLE

WOODEN SERIES

Experience bespoke interior design that transforms spaces into luxurious environments of beauty, sophistication, and lasting emotional connection.



530 | ROPE CRUSH

KRIDHA® LAMINATES
QUALITY KI BAAT KRIDHA KE SAATH




WOODEN SERIES



Bold, expressive interiors that celebrate your uniqueness, combining color, texture, and artistry to shape unforgettable living experiences.

KRIDHA® LAMINATES
QUALITY KI BAAT KRIDHA KE SAATH

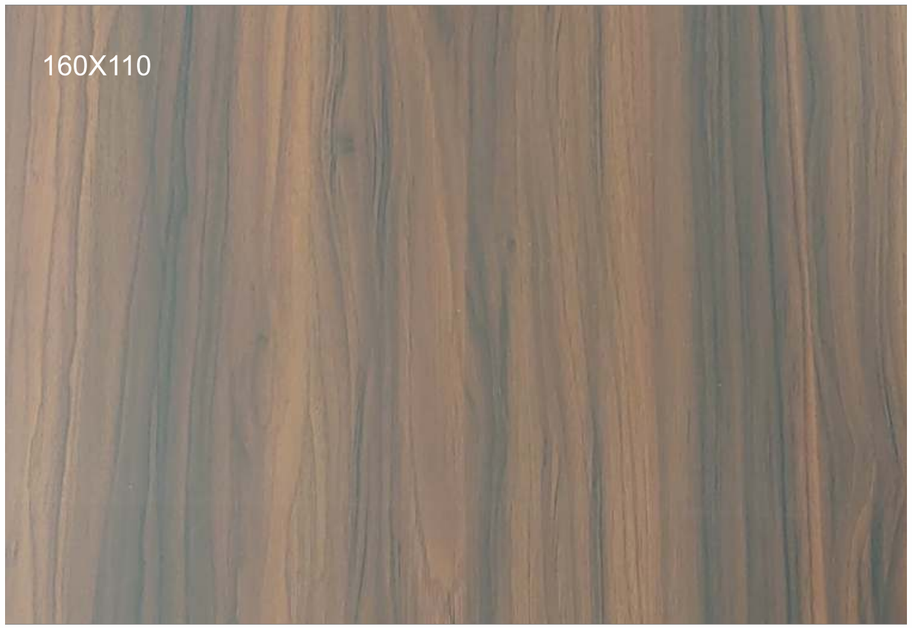

904 | RUSSIAN CEDARWOOD



2145 | SMOKY WALNUT



567 | NORTH WALNUT



518 | SAPELI



519 | ROSE WOOD



520 | ROMAN DARK

WOODEN SERIES

Curating Interiors That Speak of Elegance,
Detail, and the Luxury of Thoughtful Living.

KRIDHA® LAMINATES
QUALITY KI BAAT KRIDHA KE SAATH



508 | AMERICAN WALNUT



515 | ARIZONA WALNUT



523 | BURMA TEAK



505 | WENGE





510 | FLOWERY WENGE



507 | BAVERIAN BEACH



506 | HIGHLAND PINE




509 | NAINA TEAK


FABRIC SERIES



KRIDHA® LAMINATES
QUALITY KI BAAT KRIDHA KE SAATH

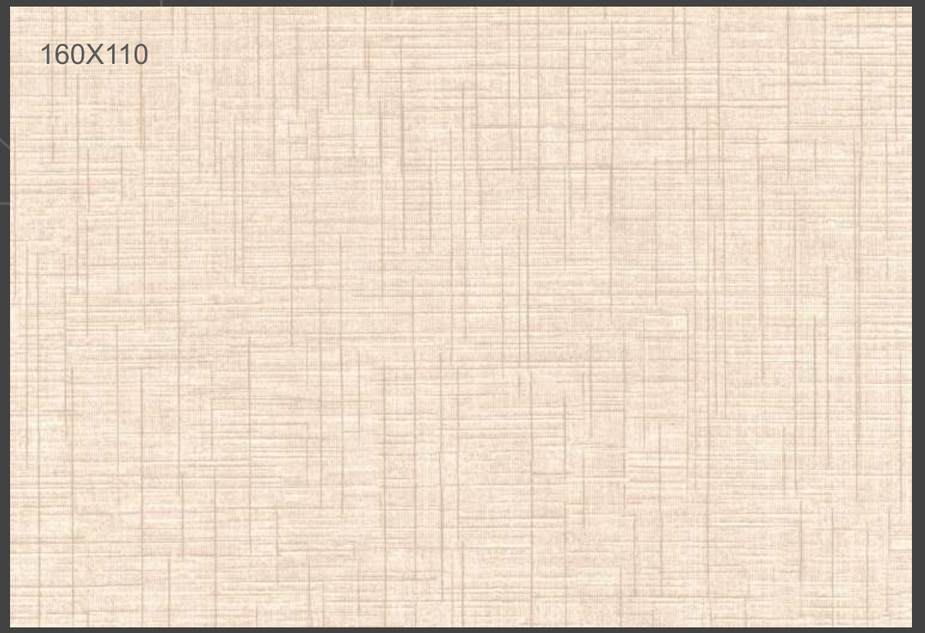


560 | CAMBRIC FAB

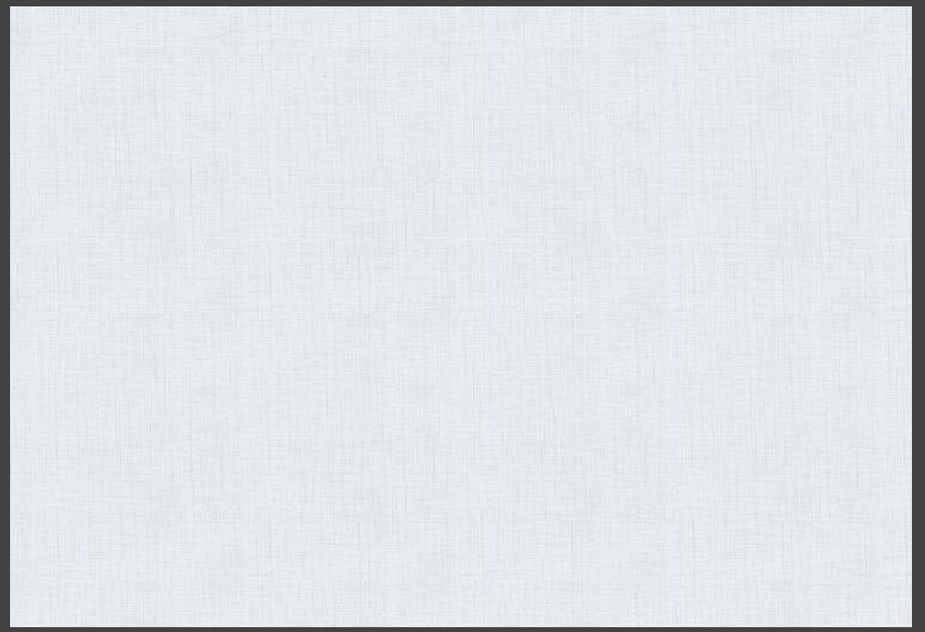


561 | CAMBRI MILK

FABRIC SERIES

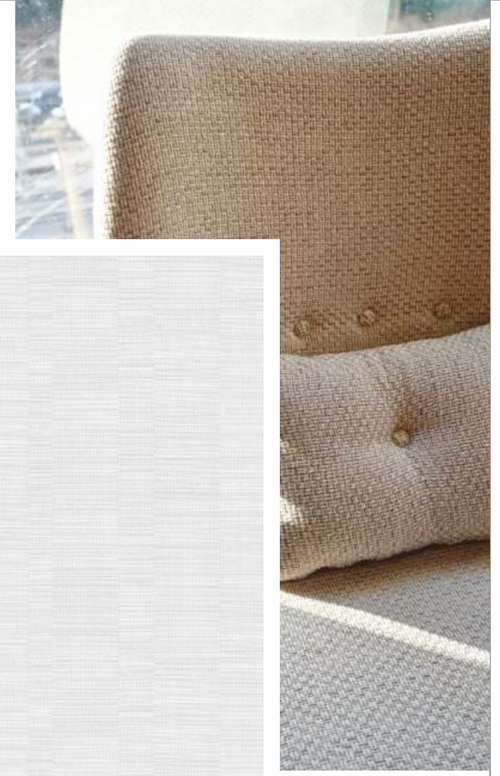

Simplifying Spaces, Elevating Life — Where Minimalism Meets Meaningful Design.

KRIDHA® LAMINATES
QUALITY KI BAAT KRIDHA KE SAATH

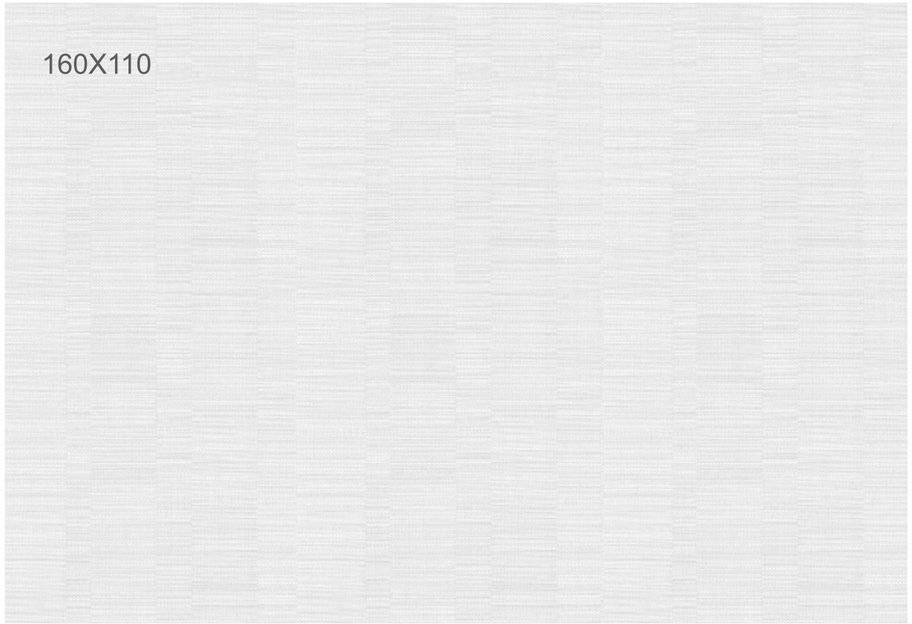

559 | DOTTED CANVAS



511 | FABRIC LIGHT



4111 | ZEOLINE



4112 | ZOLO TOUCH




551 | NEW COTTON FABRIC



552 | CHIFFON FAB DARK


FABRIC SERIES

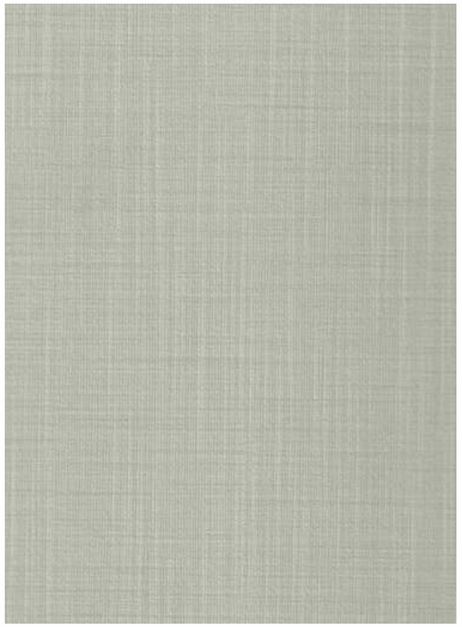

553 | CHIFFON FAB LIGHT



554 | FAB FABRIC

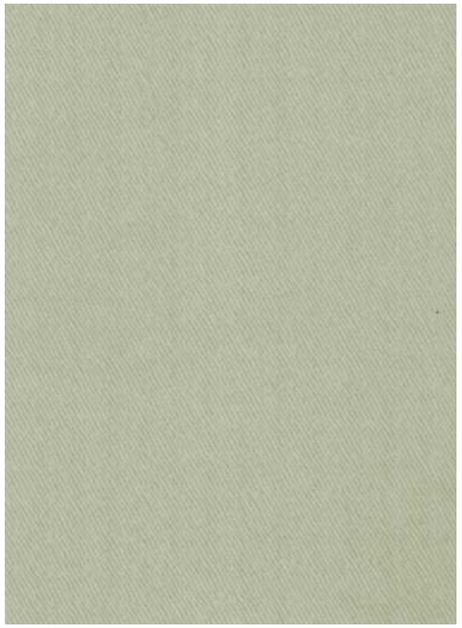

527 | CREAM CAMBRIC



4226 | FAB CREAM

KRIDHA® LAMINATES
QUALITY KI BAAT KRIDHA KE SAATH

WOVEN BEAUTY

Designing Living Spaces as Unique as You Are
With Color, Character, and Creative Vision.



557 | CROSS STITCH FABRIC



558 | THOMPSON FABRIC

SOLID SERIES



801 | ORANGE



804 | DARK BROWN



803 | BLOOD RED



806 | ELECTRIC BLUE



802 | PEACOCK GREEN



805 | BLACK



822 | CHALK GREEN



807 | PURPLE

STYLE THAT STICKS



KRIDHA® LAMINATES


QUALITY KI BAAT KRIDHA KE SAATH



501 | WHITE



502 | OFF WHITE



522 | GLOBE GREY



504 | GREY



SANDING DONE WITH GERMAN MACHINE FOR EASY PASTING

Creating Warm, Welcoming Spaces Where Function Meets Comfort and Personality Shines.

INDEX

SR.NO.	DESIGN NO.	FINISH	PG. NO.
1	501	WHITE	20
2	502	OFF WHITE	20
3	504	GREY	20
4	505	WENGE	11
5	506	HIGHLAND PINE	12
6	507	BAVERIAN BEACH	12
7	508	AMERICAN WALNUT	11
8	509	NAINA TEAK	12
9	510	FLOWERY WENGE	12
10	511	FABRIC LIGHT	15
11	515	ARIZONA WALNUT	11
12	518	SAPELI	10
13	519	ROSE WOOD	10
14	520	ROMAN DARK	10
15	522	GLOBE GREY	20
16	523	BURMA TEAK	11
17	527	CREAM CAMBRIC	17
18	530	ROPE CRUSH	07
19	551	NEW COTTON FABRIC	16
20	552	CHIFFON FAB DARK	16
21	553	CHIFFON FAB LIGHT	17
22	554	FAB FABRIC	17
23	557	CROSS STITCH FABRIC	18
24	558	THOMPSON FABRIC	18
25	559	DOTTED CANVAS	15
26	560	CAMBRIC FAB	14
27	561	CAMBRI MILK	14
28	567	NORTH WALNUT	10
29	801	ORANGE	19
30	802	PEACOCK GREEN	19
31	803	BLOOD RED	19
32	804	DARK BROWN	19
33	805	BLACK	19
34	806	ELECTRIC BLUE	19
35	807	PURPLE	19
36	822	CHALK GREEN	19
37	824	EMPERADOR MARBLE	04
38	825	CLASSENTINO MARBLE	05
39	826	RAINFOREST MARBLE	06
40	904	RUSSIAN CEDARWOOD	09
41	2145	SMOKY WALNUT	09
42	4111	ZEOLINE	16
43	4112	ZOLO TOUCH	16
44	4226	FAB CREAM	17

KRIDHA® LAMINATES
QUALITY KI BAAT KRIDHA KE SAATH

TECHNICAL SPECIFICATION

PROPERTIES	SPECIFIED VALUES AS PER IS: 2046-1995	SLEEK LAM CONFIRMS
Resistance to Surface Wear	350 (revolution)	✓
Resistance to immersion in boiling water -Mass Increase (%) -Thickness Increase (%)	 10.0 Max. 11.8 Max.	 ✓ ✓
Resistance to dry heat 180 C	Not worse than 4	✓
Dimensional stability at deviated temperature -Longitudinal (%) -Transverse (%)	 0.55 Max. 1.025 Max.	 ✓ ✓
Dimensional stability at 20 C -Longitudinal (%) -Transverse (%)	 0.375 Max. 0.60 Max.	 ✓ ✓
Resistance to impact by small diameter ball	20N Min.	✓
Resistance to cracking	Not worse than 4	✓
Resistance to stretching	2N Min.	✓
Resistance to staining	Not worse than 5	✓
Resistance to colour change (wool standards) -In Xenon arc light -In enclosed Carbon arc light	 Not worse than 6 Not worse than 5	 ✓ ✓
Resistance to cigarette burns	Not worse than 3	✓
Resistance to steam	Not worse than 4	✓
Appearance	Should be free from foreign particles	✓

Product information and warranty :

Technical Name:	High Pressure Decorative Laminated sheets
Size:	2440 mm x 1220 mm (8'x4')
Warranty:	**Sleek Lam** warrants that their products are free from any manufacturing defects and is suitable to utilize for normal and usual propose only. It is recommended that the product should be inspired prior to installation. If found any visual defects, the product should not be used, cut or altered in any manner. Warranty will be limited to cost of the products only and no claims will be entertained after fixing, alteration or used of the product.
Note:	Samples presented are indicative in all aspects i.e., colour, pattern, surface finish, thickness, etc. High gloss sheets are recommended for vertical application only. Other combination for colour, pattern & surface finish are available on special request.

Protecting The Surface:

Scratch and Impact protection :
Don't place lighted cigarette directly on laminate surface. Knives or other sharp utensils may slice or scratch the surface.
Don't chop, slice, pound or hummer on any laminate surface. Avoid ironing or placing a hot iron on laminate surface.
Hot cookware should not be placed directly on laminate surface. Heavy blows of hummer or metal may crack the laminate surface.

Ordinary Cleaning :
In most cases, only need to use a clean, damp, non-abrasive cotton cloth and a mild liquid detergent or household cleaner and rinse with clean water.
Don't flood the laminate since water can be absorbed and results substrate to swell. Dry the surface with a soft, clean and non-abrasive cotton cloth.

Chemical Damage :
Never use cleaners containing acid, alkali or sodium hypochlorite. These cleaners will mar, etch, corrode and permanently discolour the laminate surface. Also make sure that bottles, rags and other materials contaminated with these cleaners never come in contact with the laminate surface.

Direction of Use :

- Before using laminate please ensure that the surface of plywood and laminate are clean, dry and free of other contaminations.
- Please well stir adhesive before use and don't add water in it. Also ensures that applied adhesive is sufficient or not?
- Once laminate pasted on plywood surface don't forget to apply adequate pressure for perfect bonding. To remove air bubble from assembly use roller press from centre of assembly towards edge of assembly.
- A gap of minimum 2 mm should be maintained between two laminates while pasting side by side.